
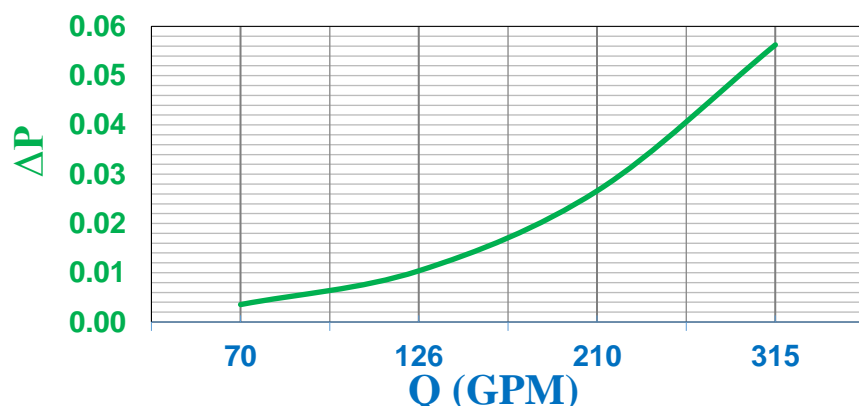
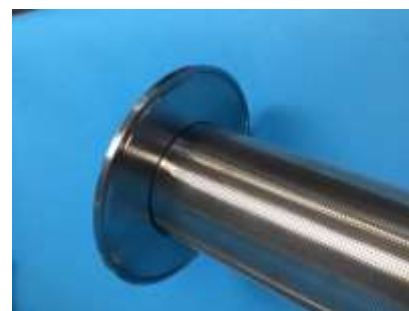


# STYLE "RS" STRAINERS

Style "RS" sanitary strainers are an economical alternate when larger basket strainers are not required.

They offer an "O" ring seal for absolute retention for exacting applications. Flow can be in either direction. Filter elements are available in "SANIWEDGE" wedge wire, perforated, with or without Stainless Steel mesh or bag overscreens. Metallic media available with retentions to 5 microns. Filter bag overscreens available from 1 micron. Standard finish is 3A certified 32ra outside, 25ra inside. All standard materials S/S 316L. Other exotic alloys also available. Buna N gaskets standard. Viton, Teflon, Silicon, EPDM (Standard/Grade 6) are available.

Based on specific process conditions, Newark Wire engineers can provide flow/pressure drop data to assist in your requirements. Typical data sheet is below.

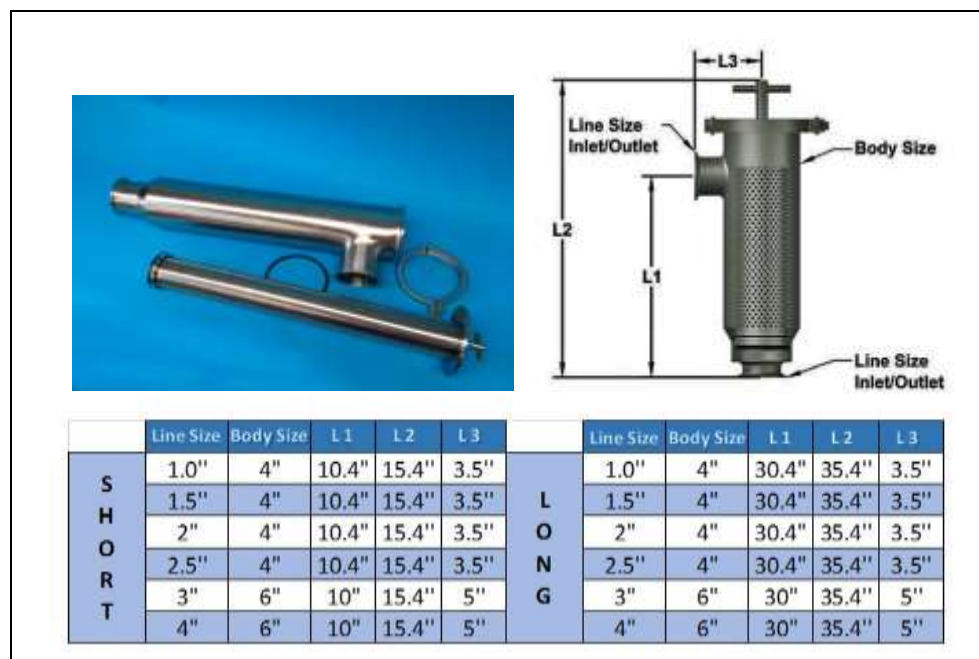

Flow data for a 2" Style "RS" short with a process fluid of 500 cps.  
Perforated element with 10 mesh 1900 micron overscreen.

**Newark**  
WIRE CLOTH COMPANY

160 Fornelius Avenue, Clifton, NJ 07013-1844  
TOLL FREE: (800) 221-0392  
PHONE: (973) 778-4478  
FAX: (973) 778-4481  
[www.newarkwire.com](http://www.newarkwire.com)  
[www.sanicleanstrainers.com](http://www.sanicleanstrainers.com)