
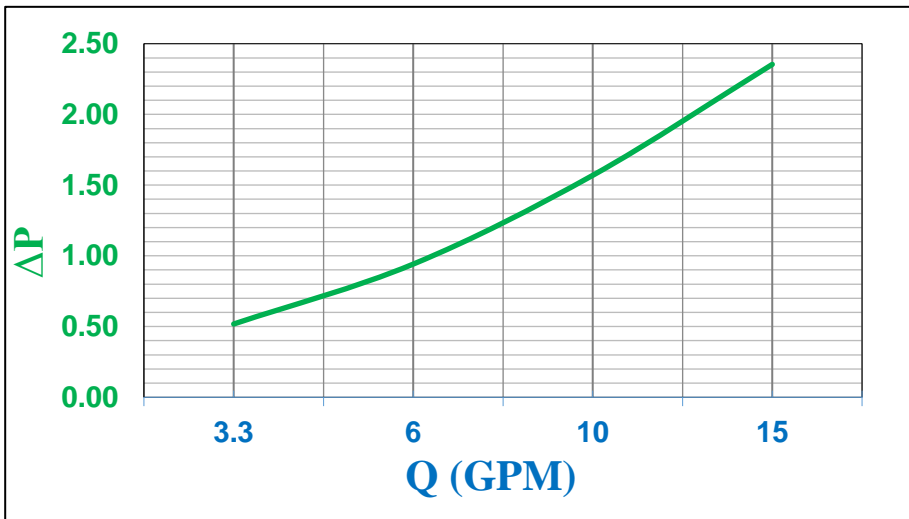


# STYLE "Y" STRAINERS

Style "Y" sanitary strainers are designed for straight through flow allowing for simple installation and cleaning. Flow can be reversed if required. They offer an "O" ring seal for absolute retention for exacting applications. Filter elements are available in "SANIWEDGE" wedge wire, perforated, with or without Stainless Steel mesh or bag overscreens. Metallic media available with retentions to 5 microns. Filter bag overscreens available from 1 micron. Standard finish is 3A certified 32ra outside, 25ra inside. All standard materials S/S 316L. Other exotic alloys also available. Buna N gaskets standard. Viton, Teflon, Silicon, EPDM (Standard/Grade 6) are available.

Based on specific process conditions, Newark Wire engineers can provide flow/pressure drop data to assist in your requirements. Typical data sheet is below.

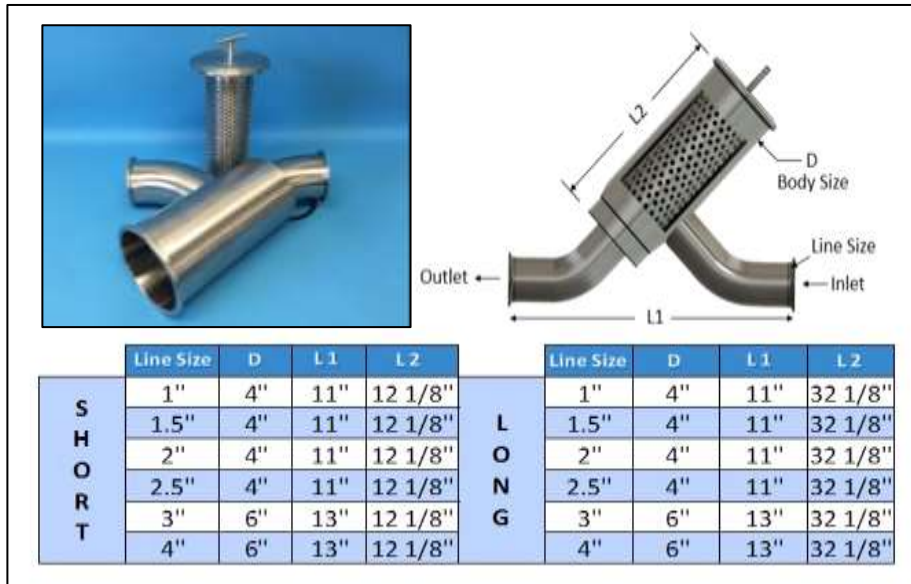

Flow data for a 1-1/2" Style "Y" long with a process fluid of 3000 cps. SaniWedge wedge wire element with .015" retention.

**Newark**  
WIRE CLOTH COMPANY  
160 Fornelius Avenue, Clifton, NJ 07013-1844  
TOLL FREE: (800) 221-0392  
PHONE: (973) 778-4478  
FAX: (973) 778-4481  
www.newarkwire.com  
www.sanicleanstrainers.com